




**AM500**

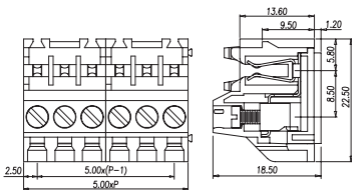

Pitch:5.00mm

**Approval**

Technical Data	UL	IEC
Rated voltage	300V	300V
Rated current	6A	6A
Conductor cross-section, solid (AWG/mm <sup>2</sup> )	28~12	0.2~2.5
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	28~12	0.2~2.5
Rated impulse voltage		4KV
Torque(N-m)	0.49	
Screw	M2.5	
Wire strip length	9~10mm	

**Pole**

**Cat.No.**

03

AM500-03P