

»» Features

- Miniature PCB relays 15A/14VDC
- Available for open frame type or flux free or sealed type.
- Single and twin relays are both available.
- Contact configurations of SPNC, SPNO, SPDT, SPDM-DB are available.
- General application for car alarm control, power window control, wiper control, door lock control, etc.
- Comply with RoHS-Directive 2002/95/EC, and ELV-Directive 2000/53/EC.

»» Type List

Terminal style	Contact form	Internal	Designation			
			Open type	Flux tight	Sealed type	Sealed type washable
PCB terminal	SPNO	Single	861-1A	861-1A-C	861-1A-V	861-1A-S
	SPDM		861-2A	861-2A-C	861-2A-V	861-2A-S
	SPDT		861-1C	861-1C-C	861-1C-V	861-1C-S
	SPDM-DB		861-2C	861-2C-C	861-2C-V	861-2C-S
	SPNO	Twin	-----	861T-1A-C	861T-1A-V	861T-1A-S
	SPDM		-----	861T-2A-C	861T-2A-V	861T-2A-S
	SPDT		-----	861T-1C-C	861T-1C-V	861T-1C-S
	SPDM-DB		-----	861T-2C-C	861T-2C-V	861T-2C-S

»» Ordering Information

861 T - 1A - C
 1 2 3 4

- | | |
|------------------------------------|--|
| 1. 861 -- Basic series designation | 2A -- Single pole double make |
| 2. Blank -- Single relay | 2B -- Single pole double break |
| T -- Twin relay | 2C -- Single pole double make-double break |
| 3. 1A -- Single pole normally open | 4. Blank -- Open type |
| 1B -- Single pole normally close | C -- Flux tight |
| 1C -- Single pole double throw | V -- Sealed type |
| | S -- Sealed type washable |

»» Contact Rating

Resistive load	SPNO	SPNC	SPDT
	15A/14VDC	10A/14VDC	NC:10A/14VDC , NO:15A/14VDC
	SPDM	SPDB	SPDM-DB
	10AX2/14VDC	7AX2/14VDC	DM:10AX2/14VDC , DB:7AX2/14VDC

»» Coil Rating(DC)

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C (Ω)	Max. continuous voltage at 85°C ⁽¹⁾	Pick up voltage(Max) at 23°C	Drop out voltage(Min) at 23°C	Power consumption at rated voltage
6	187.5	32	125 % of rated voltage	60 % of rated voltage 67% (for 2C contact configuration only)	10 % of rated voltage	approx. 1.1W
9	123.2	73				
12	92.3	130				
24	46.1	520				

Note:(1)Continuous contact current at 10A.


»» Specification

Contact material	AgSnO alloy	
Contact voltage drop ⁽¹⁾	Typ. 50mV at 10A	
Insulation resistance ⁽¹⁾	50M Ω Min. (DC 500V)	
Operate time ⁽¹⁾	4ms Max.	
Release time ⁽¹⁾	2ms Max.	
Dielectric strength ⁽¹⁾	Between open contact	: AC 500V , 50/60Hz 1 min.
	Between contact and coil	: AC 500V , 50/60Hz 1 min.
Vibration resistance	10~55Hz , amplitude 1.5 mm	
Shock resistance	10G , 11ms , half sine wave pulse	
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (frequency 1,800 operations/hr)
Operating ambient temperature	-40~+85°C (no freezing)	
Weight	Approx. 17.5g	


Note : (1) initial value

»» Outline Dimensions


◆861

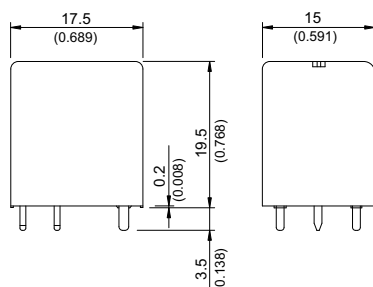

◆861 OPEN TYPE




◆ 861T

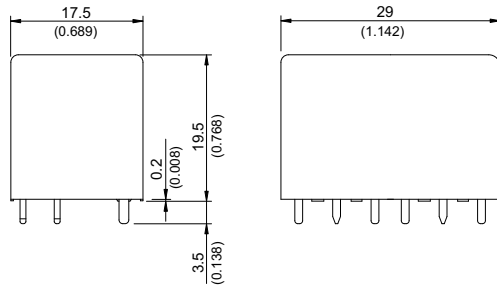


»» Wiring Diagram

BOTTOM VIEW

◆ 861

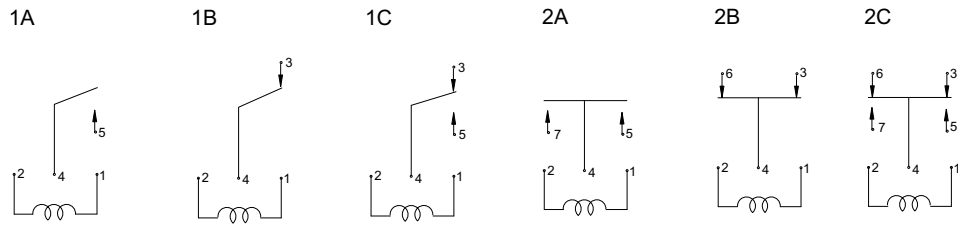


◆ 861T

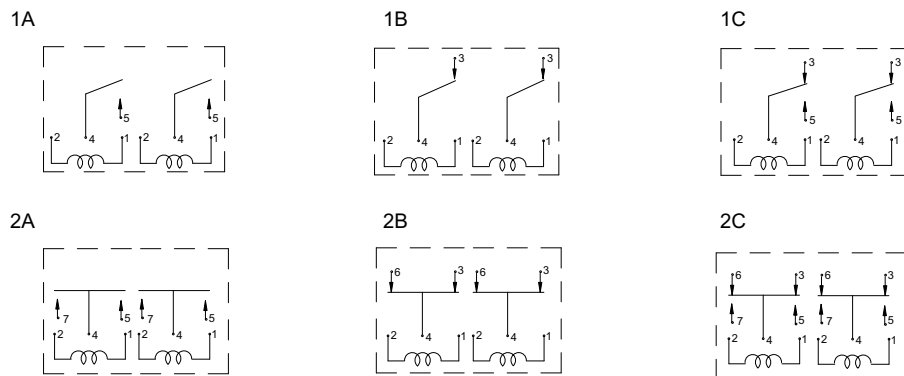


»» PC Board Layout

BOTTOM VIEW


◆ 861



◆ 861 OPEN TYPE

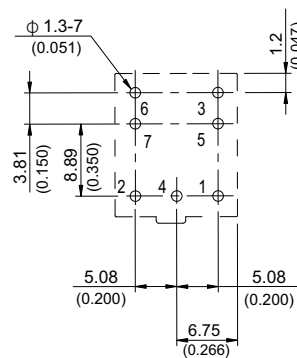

◆ 861T

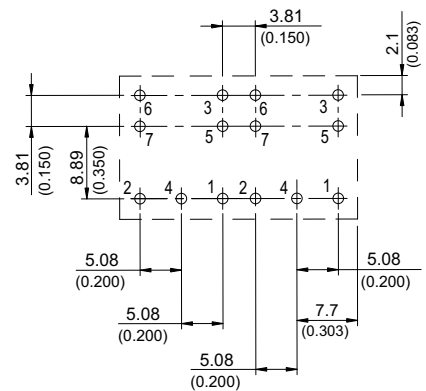

»» Engineering Data

